


KRACHT


SINTERBRONZEN GELUIDDEMPERS

Max. druk 10 bar
Temperatuur -10 / + 80 gr.C

Art.	A	B	CH	F	L	H
1 SEM	1/8"	8	13	6	8,5	20
2 SEM	1/4"	11	16	8	10	25
3 SEM	3/8"	13,5	19	9	12	29
4 SEM	1/2"	17	24	11	15	35
5 SEM	3/4"	22	30	13	15,5	39
6 SEM	1"	29	36	15	18	45

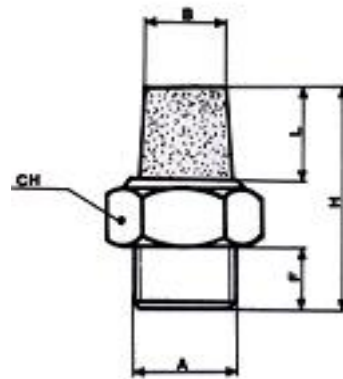


36 micron

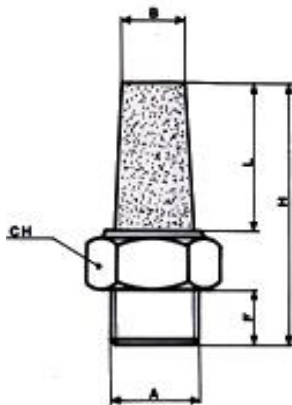

Art.	A	B	CH	F	L	H
1 SE	1/8"	7	13	6	16	29
2 SE	1/4"	9	16	8	16,5	32
3 SE	3/8"	13	19	9	25,5	43
4 SE	1/2"	16	24	11	33	53
5 SE	3/4"	20	30	13	30	53

36 micron

Art.	A	B	C	F	L	H
1 SCT	1/8"	12	8	6	15	21
2 SCT	1/4"	15	11	6	19	25
3 SCT	3/8"	19	15	8	28	36
4 SCT	1/2"	23	18	10	33	43
5 SCT	3/4"	30	23	13	40	53
6 SCT	1"	38	28	15	48	63

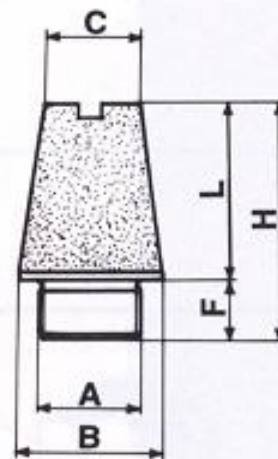


36 micron

KRACHT


SINTERBRONZEN GELUIDDEMPERS

Max. druk 10 bar
Temperatuur -10 / + 80 gr.C

Art.	A	B	CH	F	S	H
1 SEP	1/8"	11	13	6	4	13
2 SEP	1/4"	14	16	8	4	16
3 SEP	3/8"	17	19	9	4	18
4 SEP	1/2"	22	24	11	4	20
5 SEP	3/4"	28	30	13	4	24



80 micron



Art.	A	B	C	S	H
1 SP	1/8"	7	5	2	4
2 SP	1/4"	9	6	3	4
3 SP	3/8"	11	8	4	5
4 SP	1/2"	16	12	4	8
5 SP	3/4"	22	17	4	10

50 micron